



strength in materials

S-3 HDI® Yarn

Low CTE, High Modulus Glass Fiber Yarn for IC Substrate PCB Applications


AGY's S-3 HDI® yarns are specifically designed to meet the demanding performance requirements of IC substrate PCBs.

Product Application

The use of smartphones and tablet PCs continues to grow globally. In addition, the functionality of these devices continues to increase, which has created the need for smaller and highly specialized PCBs. IC substrates are utilized as the connection between the IC chips and the PCB, and represent state-of-the-art miniaturization in PCB design. Often referred to as chip scale package, package-on-package, or multi-chip package solutions, these PCBs are routinely found in smartphones and tablet PCs.

Product Description

S-3 HDI yarns are produced using a proprietary, patent pending glass composition designed for the specific requirements of low coefficient of thermal expansion (CTE) and high tensile modulus. S-3 HDI yarns are available in a wide range of fiber micronage and yield/tex, including ultra-fine yarns for the thinnest substrates.

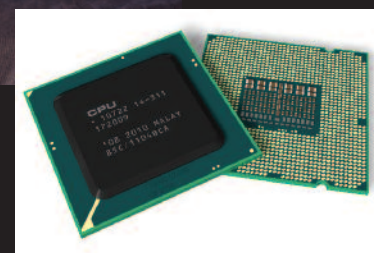

Features	Benefits
CTE = 3.5 ppm/OC vs. 5.4 ppm/OC for E-Glass	Minimizes CTE mismatch with silicon chips, improving substrate reliability
Tensile Modulus = 86 GPa vs. 72 GPa for E-Glass	Enables thin substrates with minimum warpage at elevated temperatures
Low hollow fibers	Excellent conductive anodic filamentation (CAF) resistance
Wide range of fiber micronage and yield/tex	Wide range of possible substrate thicknesses
Highly homogeneous glass quality	Consistent performance in PCB applications
Treated with electronics grade starch/oil sizing	Fabric surface smoothness with high-speed air-jet weaving

PRODUCT INFORMATION

AGY has been a provider of fine yarns to the electronics industry for a significant number of years and using the experience gained has now a range of fine, extra fine as well as ultrafine yarns to meet the demands of the printed circuit board industry. Today AGY offers E-Glass yarns into a number of fabric styles and weights, from fabrics used in desktop computers to light weight fabrics used in mobile devices used today and tomorrow.

Meeting the demands for the electronics market has also meant that AGY has developed a number of glass fibers to meet the demands in a range of applications, from high strength and low coefficient of thermal expansion to low dielectric loss. AGY's unique manufacturing footprint allows the manufacture of these high performance fibers in a way to meet the demand of customers during low volume startup right through to high volume manufacturing with the right volumes at the right time. AGY, being an independent glass fiber producer, can work with any of the fabric producers supplying the electronics industry globally.

PROPERTIES

	Units	S-3 HDI®	E-Glass
Dielectric Constant, ϵ' , (Dk)	@1 GHz	5.4	7.0
	@10 GHz	5.3	6.9
Dissipation Factor, $\tan \delta$, (Df)	@1 GHz	0.006	0.005
	@10 GHz	0.007	0.007
Density	g/cm ³	2.45	2.54
Softening Point	°C	940	846
Coefficient of Thermal Expansion	ppm/°C	3.5	5.4
Tensile Load to Failure (D450 fiber)	N	9.5	8.9
Tensile Modulus	GPa	83	75

AVAILABLE PRODUCTS AND TYPICAL USES

YARN		Typical IPC Fabric Styles	Typical Substrate Thickness (°m)
US Units	SI Units		
SCE255 1/0 1.0Z	SC7-22 1x0 Z40	2116	100
SCD450 1/0 1.0Z	SC5-11 1x0 Z40	1078	50
SCC1200 1/0 1.0Z	SC4.5-4.1 1x0 Z40	1037	30
SCBC1500 1/0 1.0Z	SC4-3.3 1x0 Z40	1027	20
SCBC3000 1/0 0.7Z	SC4-1.7 1x0 Z28	1017	15

All products with sizing 620-1 on 7636 bobbin



World Headquarters/Americas
 2556 Wagener Road
 Aiken, South Carolina, 29801 USA
 Phone: +(1) 888.434.0945 (toll free)
 +(1) 803.643.1501
 Fax: +(1) 803.643.1180
 Email: asktheexperts@agy.com

Europe
 Le Gemellyon Nord
 57 Boulevard Marius Vivier Merle
 69003 Lyon, France
 Phone: +(33) 4727 81775
 Fax: +(33) 4727 81780

Asia
 Suite 1306-8, Bldg 1
 No. 1628 Jinshajiang Rd.
 Shanghai 200333 China
 Phone: +(86) 21 3251 3871
 Fax: +(86) 21 3251 2839

www.agy.com

DISCLAIMER OF LIABILITY

This data is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any liability arising out of its use or performance. The user, by accepting the products described herein, agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement.

BECAUSE OF NUMEROUS FACTORS AFFECTING RESULTS, WE MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. STATEMENTS IN THIS DOCUMENT SHALL NOT BE CONSTRUED AS REPRESENTATIONS OR WARRANTIES OR AS INDUCEMENTS TO INFRINGE ANY PATENT OR VIOLATE ANY LAW, SAFETY CODE, OR INSURANCE REGULATION.