

## R-310 – S-2 Glass® Roving

S-2 Glass® rovings are specifically designed and intended for filament wound or pre-impregnation applications requiring exceptional mechanical, physical, thermal, and electrical properties.

### General Product Specifications

#### Product Information

Glass Type	S-2			S-2			
	365			449			
Binder	Epoxy, PE, VE			Epoxy, PU			
Compatibility*	9			9			
Filament Diameter - µm	250	750	1250	250	750	1250	2500
Nominal Yield	4059	4059	4059	4059	4059	4059	4059
Package	SG75	SG75	SG75	SG75	SG75	SG75	SG75
Input Sliver	30	10	6	30	10	6	3
Number of Ends	249	746	1222	245	735	1222	2444
Nominal Yield - yd/lb	1992	665	406	2025	675	406	203
Tex - g/1000 m	91	27	18	80	28	18	14
Tex Tolerance +/-	0.50	0.50	0.50	0.65	0.65	0.65	0.65
Nominal Solids - %	0.15	0.15	0.15	0.10	0.10	0.10	0.10
Solids Tolerance +/-	4.5 (11.43)	1.0 (2.54)	1.0 (2.54)	4.5 (11.43)	1.0 (2.54)	1.0 (2.54)	1.0 (2.54)
Maximum Catenary - in (cm)	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Maximum Moisture - %	0.035	0.035	0.035	0.035	0.035	0.035	0.035
Maximum Fuzz - g	0.050	0.050	0.050	0.054	0.054	0.054	0.054
Nominal Package Density - lb/in <sup>3</sup>	0.009	0.009	0.009	0.009	0.009	0.009	0.009
Package Density Tolerance +/-	70 - 90	70 - 90	70 - 90	50 - 90	50 - 90	50 - 90	50 - 90
Package Hardness Range - Shore 'O'	450 (3103)	495 (3143)	450 (3103)	450 (3103)	515 (3551)	450 (3103)	450 (3103)
Minimum Impregnated Strand Tensile Strength - Ksi (Mpa)							

#### Packaging Information

Package	4059	4059	4059	4059	4059	4059	4059
Nominal Package Weight - lb (kg)	16.0 (7.26)	16.0 (7.26)	15.0 (6.80)	16.0 (7.26)	16.5 (7.48)	15.0 (6.80)	15.0 (6.80)
Nominal Package Length - yd (m)	3,875 (3,543)	12,000 (10,973)	18,000 (16,459)	3,875 (3,543)	12,000 (10,973)	18,000 (16,459)	36,000 (33,098)

Rev 13, 10.27.2020

\* Compatibility is resin specific, please contact your AGY representative for more details.

## R-310 – S-2 Glass® Roving

S-2 Glass® rovings are specifically designed and intended for filament wound or pre-impregnation applications requiring exceptional mechanical, physical, thermal, and electrical properties.

### General Product Specifications

#### Product Information

Glass Type	S-2				S-2		
	<b>463</b>				<b>933</b>		
Binder	Epoxy				Epoxy, Phenolic, BMI		
Compatibility*	9				9		
Filament Diameter - µm	<b>250</b>	<b>750</b>	<b>750</b>	<b>1250</b>	<b>310</b>	<b>750</b>	<b>1250</b>
Nominal Yield	4059	4059	4059	4059	4059	4059	4059
Package	SG75	SG75	SG150	SG75	SG75	SG75	SG75
Input Sliver	30	10	20	6	24	10	6
Number of Ends	244	733	733	1222	307	735	1222
Nominal Yield - yd/lb	2033	677	677	406	1616	675	406
Tex - g/1000 m	80	29	29	20	130	38	20
Tex Tolerance +/-	1.00	1.00	1.00	1.00	0.23	0.23	0.23
Nominal Solids - %	0.16	0.16	0.16	0.16	0.10	0.10	0.10
Solids Tolerance +/-	4.5 (11.43)	1.0 (2.54)	1.0 (2.54)	1.0 (2.54)	3.5 (8.89)	3.0 (7.62)	4.5 (11.43)
Maximum Catenary - in (cm)	0.03	0.03	0.03	0.03	0.06	0.06	0.06
Maximum Moisture - %	0.035	0.035	0.035	0.035	0.035	0.035	0.035
Maximum Fuzz - g	0.047	0.054	0.054	0.054	0.055	0.055	0.055
Nominal Package Density - lb/in <sup>3</sup>	0.007	0.009	0.009	0.009	0.009	0.009	0.009
Package Density Tolerance +/-	50 - 90	50 - 90	50 - 90	50 - 90	60 - 110	60 - 110	60 - 110
Package Hardness Range - Shore 'O'	450 (3103)	495 (3143)	495 (3143)	450 (3103)	450 (3103)	525 (3620)	450 (3103)
Minimum Impregnated Strand Tensile Strength - Ksi (Mpa)							

#### Packaging Information

Package	4059	4059	4059	4059	4059	4059	4059
Nominal Package Weight - lb (kg)	16.0 (7.26)	16.5 (7.48)	16.5 (7.48)	15.0 (6.80)	16.0 (7.26)	15.0 (6.80)	15.0 (6.80)
Nominal Package Length - yd (m)	3,875 (3,543)	12,000 (10,973)	12,000 (10,973)	18,000 (16,459)	5,000 (4,570)	11,000 (10,050)	18,000 (16,459)


Rev 13, 10.27.2020

\* Compatibility is resin specific, please contact your AGY representative for more details.

# R-310 – S-2 Glass<sup>®</sup> Roving

## Nominal Packaging Dimensions

Package	Pallet	Packages / Layer	Layers / Carton	Cartons / Pallet	Packages / Pallet	L-in (cm)	W-in (cm)	H-in (cm)
4059	Wood	20	3	1	60	45.0 (114.3)	31.0 (78.7)	39.0 (99.1)

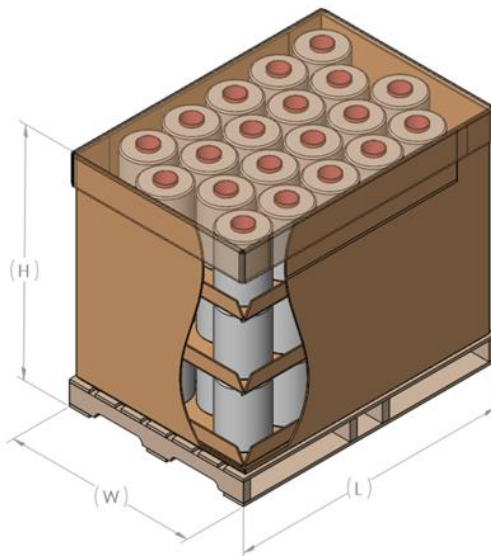

## Storage, Shelf Life and Handling

### Storage and Shelf Life:

AGY recommends storing the materials in accordance with appropriate safety considerations, away from exposure to the elements and at 65-80F (18-27C) and 50-70% humidity. If the materials are stored under these conditions, they are stable, non reactive and will not degrade or exhibit negative characteristics for at least 3 years from the date of manufacture. Unused, unopened product older than this is likely still in good condition, however careful evaluation is recommended. Prior to use, pallets should be placed in the production area and any plastic wrap removed for a minimum of 24 hours to allow the material to acclimate to the processing environment. Special care should be given to pallets being moved from a cold environment into a warm, humid area as condensation may occur and this additional moisture can negatively impact the runability of the material, however, once the material has acclimated, this will no longer be an issue.

For product traceability reasons, the pallet label should be recorded or retained.

### Handling:

Fiberglass products process best if temperature and humidity are controlled, primarily because this will help to minimize the buildup of static electricity, fuzz and fly. AGY recommends that the material be run at 70 +/- 5 degrees F (18-27C) and 60 +/- 5% RH.

## Test Methods and Certificates

A copy of test methods and or a certificate of conformity may be issued upon request.

Packages will be firmly and evenly wound on the tube, and free from defects in workmanship. AGY accepts no responsibility for damaged material that shows any signs of physical abuse.

For additional product information, refer to PTS M-711

### AGY – World Headquarters / Americas

2556 Wagener Road  
 Aiken, South Carolina, USA 29801  
 Phone: +(1) 888.434.0945 (toll free)  
 +(1) 803.643.1501  
 Fax: +(1) 803.643.1180  
 Email: asktheexpert@agy.com

### AGY – Europe

Le Gemellyon Nord  
 57 Boulevard Marius Vivier Merle  
 69003 Lyon, France  
 Phone: +(33) 4727 81775  
 Fax: +(33) 4727 81780

### AGY – Asia

Suite 1306-8, Bldg. 1,  
 No. 1628 Jinshajiang Rd.  
 Shanghai 200333 China  
 Phone: +(86) 21 3251 3871  
 Fax: +(86) 21 3251 2839