


Y-140 – S-3 HPB™ Yarns



S-3 HPB™ yarns are designed for medical applications and have been tested for cytotoxic effects in accordance with ISO 10993-5: Biological Evaluation of Medical Devices, Part 5: Tests for In Vitro Cytotoxicity. The results of that testing showed no evidence of cell lysis or toxicity and so met the requirements of the test since the grade was less than “mild reactivity”, Grade 2.

General Product Specifications

Product Information

Product	SCG37
Glass Type	S-3 HPB™
Filament Diameter - micron	9
Binder	383
Bobbin	7636
Plies	1/0
Nominal Yield - yd/lb	3,750
Tex - g/1000 m	132.2
Tex tolerance +/-	12
Nominal Solids %	0.8
Solids Tolerance +/-	0.2
Nominal Twist TPI (TPM)	0.52 (220)
Twist Tolerance +/- TPI (TPM)	0.15 (6)
Max. Broken Filaments*	15
Minimum Tensile - lb (N)	21.6
Average of 5 tests	(96)

*broken filaments based on average 360° check

Nominal Product Characteristics

For reference only, not specified or controlled)

Average Bare Glass Tensile - lb (N)*	30 (134)
Approximate Yarn Diameter - in (mm)	0.0156 (0.396)

*Reflects average tensile per bobbin

Packaging Information


Bobbin	7636
Package Weight - lb (kg)	2.2 (1.0)
Min bobbin Weight - lb (kg)	0.25 (0.11)
Metered Bobbin Length - yd (m)	8140 (7443)
Metered Ratio	50%

Rev 6, 11/22/2016

Y-140 – S-3 HPB™ Yarns

Nominal Packaging Dimensions

Bobbin	Pallet	Bobbins / Layer	Layers / Carton	Cartons / Pallet	Bobbins / Pallet	L-in (cm)	W-in (cm)	H-in (cm)
7636	Wood	18	3	4	216	45.5 (115.6)	45.5 (115.6)	45 (114.3)

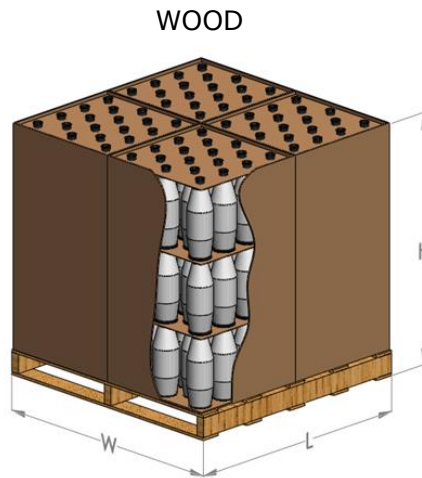

Storage, Shelf Life and Handling

Storage and Shelf Life:

AGY recommends storing the materials in accordance with appropriate safety considerations, away from exposure to the elements and at 65-80F (18-27C) and 50-70% humidity. If the materials are stored under these conditions, they are stable, non reactive and will not degrade or exhibit negative characteristics for at least 3 years from the date of manufacture. Unused, unopened product older than this is likely still in good condition, however careful evaluation is recommended. Prior to use, pallets should be placed in the production area and any plastic wrap removed for a minimum of 24 hours to allow the material to acclimate to the processing environment. Special care should be given to pallets being moved from a cold environment into a warm, humid area as condensation may occur and this additional moisture can negatively impact the runability of the material, however, once the material has acclimated, this will no longer be an issue.

For product traceability reasons, the pallet label should be recorded or retained.

Handling:

Fiberglass products process best if temperature and humidity are controlled, primarily because this will help to control the buildup of static electricity, fuzz and fly. AGY recommends that the material be run at 70 +/- 5 degrees F and 60 +/- 5% RH.

Test Methods and Certificates

A copy of test methods and or a certificate of conformity may be issued upon request.

Packages will be firmly and evenly wound on the bobbin, and free from defects in workmanship. AGY accepts no responsibility for damaged material that shows any signs of physical abuse.

For additional product information, refer to PTS M-710

AGY – World Headquarters / Americas

2556 Wagener Road
Aiken, South Carolina, USA 29801
Phone: +(1) 888.434.0945 (toll free)
+(1) 803.643.1501
Fax: +(1) 803.643.1180
Email: asktheexpert@agy.com

AGY – Europe

Le Gemellyon Nord
57 Boulevard Marius Vivier Merle
69003 Lyon, France
Phone: +(33) 4727 81775
Fax: +(33) 4727 81780

www.agy.com

AGY – Asia

Phone: +(86) 21 3251 3871