

Y-260 – Beta and Sewing Thread



These products are used for sewing and small diameter tying operations where a high temperature, inorganic, flexible and high strength thread is required..

General Product Specifications

Product Information

Product	ECBC150					BC-4	BC-6	BC-8
	E					E	E	E
Glass Type	E					E	E	E
Filament Diameter - microns	4	4	4	4	4	4	4	4
Plies	1/0	1/0	1/0	2/0	4/0	2/2	2/3	2/4
Binder	636	636	636	636	636	636	636	636
Bobbin	7636	9228	7636	9228	9228	8542	8542	8542
Nominal Yield - yd/lb	14,900	14,900	14,900	7,450	3,700	3,550	2,330	1,730
Tex - g/1000 m	33.3	33.3	33.3	66.6	134.1	139.7	212.9	286.7
Tex tolerance +/-	3.6	3.6	3.6	1.8	2.5	5.0	6.4	7.2
Nominal Solids %	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45
Solids Tolerance +/-	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Nominal Twist TPI (TPM)	1.0Z (Z40)	3.0Z (Z120)	3.0Z (Z120)	3.0Z (Z120)	3.0Z (Z120)	9.6Z (Z384)	9.1Z (Z364)	8.3Z (Z332)
Twist Tolerance +/- TPI (TPM)	0.3 (12)	0.6 (24)	0.6 (24)	0.6 (24)	0.6 (24)	0.96 (38)	0.91 (36)	0.83 (33)
Max. Broken Filaments*	50	50	50	50	50	50	50	50
Minimum Tensile - lb (N)	4.0 (17.8)	4.0 (17.8)	4.0 (17.8)	8.0 (35.6)	16.0 (71.2)	13.0 (57.8)	20.0 (89.0)	25.0 (111.2)

*broken filaments based on average 360° check

Nominal Product Characteristics (For reference only, not specified or controlled)

Average Bare Glass Tensile - lb (N)*	5.2 (23.1)	5.2 (23.1)	5.2 (23.1)	10.1 (44.9)	20.3 (90)	27.4 (122)	33.7 (150)	90.3 (401)
Approximate Yarn Diameter - in (mm)	0.008 (0.203)	0.008 (0.203)	0.008 (0.203)	0.0097 (0.246)	0.0137 (0.348)	0.014 (0.356)	0.017 (0.432)	0.02 (0.508)

*Reflects average tensile per bobbin

Packaging Information

Bobbin	7636	9228	7636	9228	9228	8542	8542	8542
Package Weight - lb (kg)	3.8 (1.76)	3.8 (1.76)	3.8 (1.76)	7.95 (3.61)	7.95 (3.61)	7.98 (3.62)	8.00 (3.63)	7.98 (3.62)
Min bobbin Weight - lb (kg)	2.0 (.91)	2.0 (.91)	2.0 (.91)	2.0 (.91)	2.0 (.91)	0.5 (.23)	0.5 (.23)	0.5 (.23)
Metered Bobbin Length - yd (m)	56,300 (51,480)	56,300 (51,480)	56,300 (51,480)	58400 (53400)	27700 (25300)	NA	NA	NA
Metered Ratio	70%	70%	70%	70%	70%	NA	NA	NA


Rev 9, 12/20/2017

Y-260 – Beta and Sewing Thread

Nominal Packaging Dimensions

Bobbin	Pallet	Bobbins / Layer	Layers / Carton	Cartons / Pallet	Bobbins / Pallet	L-in (cm)	W-in (cm)	H-in (cm)
7636	Wood	18	3	4	216	45.5 (115.6)	45.5 (115.6)	45 (114.3)
8542	Wood	10	3	4	120	45.5 (115.6)	45.5 (115.6)	43 (109.2)
9228	Wood	12	3	4	144	45.5 (115.6)	45.5 (115.6)	38 (96.5)

WOOD

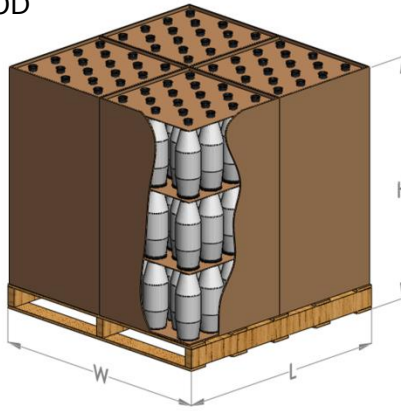

Storage, Shelf Life and Handling

Storage and Shelf Life:

AGY recommends storing the materials in accordance with appropriate safety considerations, away from exposure to the elements and at 65-80F (18-27C) and 50-70% humidity. If the materials are stored under these conditions, they are stable, non reactive and will not degrade or exhibit negative characteristics for at least 3 years from the date of manufacture. Unused, unopened product older than this is likely still in good condition, however careful evaluation is recommended. Prior to use, pallets should be placed in the production area and any plastic wrap removed for a minimum of 24 hours to allow the material to acclimate to the processing environment. Special care should be given to pallets being moved from a cold environment into a warm, humid area as condensation may occur and this additional moisture can negatively impact the runability of the material, however, once the material has acclimated, this will no longer be an issue.

For product traceability reasons, the pallet label should be recorded or retained.

Handling:

Fiberglass products process best if temperature and humidity are controlled, primarily because this will help to control the buildup of static electricity, fuzz and fly. AGY recommends that the material be run at 70 +/- 5 degrees F and 60 +/- 5% RH.

Test Methods and Certificates

A copy of test methods and or a certificate of conformity may be issued upon request.

Packages will be firmly and evenly wound on the bobbin, and free from defects in workmanship. AGY accepts no responsibility for damaged material that shows any signs of physical abuse.

For additional product information, refer to PTS M710

AGY – World Headquarters / Americas

2556 Wagener Road
 Aiken, South Carolina, USA 29801
 Phone: +(1) 888.434.0945 (toll free)
 +(1) 803.643.1501
 Fax: +(1) 803.643.1180
 Email: asktheexpert@agy.com

AGY – Europe

Le Gemellyon Nord
 57 Boulevard Marius Vivier Merle
 69003 Lyon, France
 Phone: +(33) 4727 81775
 Fax: +(33) 4727 81780

www.agy.com

AGY – Asia

Phone: +(86) 21 3251 3871