



strength in materials

636 S-2 Glass® Yarn

High-Strength Solutions for Your Toughest Reinforcement Challenges

AGY's S-2 Glass® high-strength fibers are specifically designed to meet your most demanding performance processing and cost requirements. AGY's global network of people and facilities are ready to help you develop innovative solutions to your most difficult reinforcement challenges.

Product Application

636 S-2 Glass yarn is designed to be used in transportation, construction and recreation applications such as:

- Aircraft cargo liners
- High temperature insulation
- High temperature filtration
- Surfboards

Product Solutions

S-2 Glass fibers offer a unique combination of properties: strength, impact resistance, stiffness, radar transparency and temperature and fatigue resistance. Compared with other reinforcing materials, S-2 Glass fibers weigh less than conventional glass fiber and deliver better cost performance than aramid and carbon fibers. In addition, these yarns meet the requirements of MIL-Y-1140H specifications.

Product Description


636 S-2 Glass direct sized yarns consist of numerous filaments of varying diameters, twisted to form yarns. The material's starch-oil sizing, which protects the glass filaments from abrasion during processing, is typically removed after processing and the fabric is treated with a resin compatible finish.

Resin Compatibility

- Starch-oil sized for weaving and processing

Processes

- Weaving
- Braiding
- Plying

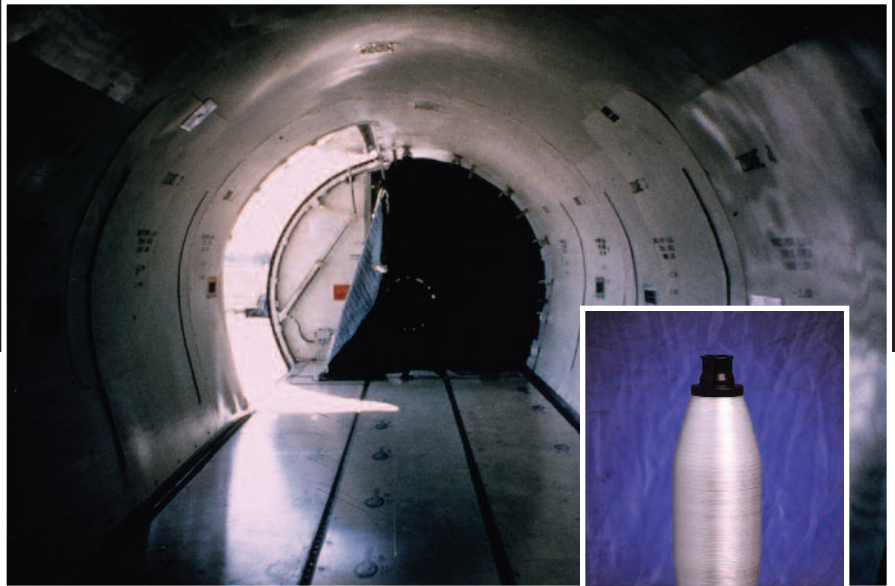

Aircraft Cargo Liner



S-2 Glass Fiber Yarn

Features	Benefits
S-2 Glass fiber offers significantly more strength than conventional glass fiber: 85% more tensile strength in resin impregnated strands	Consistent high performance for reliable and durable finished parts
Better fiber toughness, modulus of resilience and impact deformation than conventional glass fiber	Improved impact capabilities to finished parts and higher composites durability and damaged tolerance
Softening point: 1056°C (1932°F) Annealing point: 816°C (1500°F) Strain point: 766°C (1410°F)	Greater fiber tensile strength and stability at elevated temperatures in thermoset and thermoplastic applications
Enhanced stiffness	Delivers 25% more linear-elastic stiffness than conventional glass fiber
Excellent tolerance to damage accumulation	The ability of composite parts to withstand high levels of tension and flexural fatigue without catastrophic failure
S-2 Glass fibers deliver 20% reduction in dielectric constant over E-Glass fibers	Radar transparency
Long shelf life, good machinability and excellent durability	Consistent performance and reliability
S-2 Glass fiber is an organic material	Fire resistant
S-2 Glass fiber's pristine white color provides consistent cosmetics	Consistent appearance

PRODUCT INFORMATION

Available Products

Yarn Type (metric)	Construction	Nominal Twist		Sizing	Approximate Yarn Diameter		Nominal Bareglass Yield		Denier	Nominal Filament Diameter
		TPM	TPI		mm	inch	TEX	Yard/Pound		
SCG75 (SC9 66)	1/0	Z40	1.0Z	636	0.192	0.0076	66	7,500	594	"G" or 9 microns
SCG150 (SC9 33)	1/0	Z40	1.0Z	636	0.136	0.0054	33	15,000	297	"G" or 9 microns
SCD450 (SC5 11)	1/0	Z40	1.0Z	636	0.076	0.0030	11	45,000	99	"D" or 5 microns

Glass Composition

"S Glass" - reference ASTM C 162-98,
ISO 2078, MIL-S-13949H

Solids (% LOI*)

0.670 minimum
1.17 nominal
2.17 maximum

* Loss on ignition after drying

Additional References

Customer acceptance standard: TP-378

Packaging

Package #	7636	
Type Build	Double Taper	
Descriptions	Metric (cm)	English (in)
Inside diameter	6.05	2.38
Tube length	35.6	14.0
Traverse	30.9	12.18
Flange diameter	10.1	3.96
Maximum full package diameter	11.4	4.5
Minimum package weight	0.23kg	0.50lbs
Packages/carton	54 (18x3 layers)	
Cartons/pallet	4	
Packages/pallet	216	
Approximate net weight/pallet	500kg	1100lbs
Pallets/typical truckload	40	

S-2 Glass is a registered trademark of AGY.

www.agy.com



World Headquarters/Americas

2556 Wagener Road • Aiken, South Carolina, 29801 USA • Phone: +(1) 888.434.0945 (toll free) • +(1) 803.643.1501 • Fax: +(1) 803.643.1180
Email: asktheexperts@agy.com

Europe

Le Gemellyon Nord
57 Boulevard Marius Vivier Merle
69003 Lyon, France
Phone: +(33) 4727 81775
Fax: +(33) 4727 81780

China

Shanghai Huazheng Composites
Co., Ltd
Suite 1306-8, Bldg 1,
No.1628 Jinshajiang Rd.
Shanghai 200333 China
Phone: +(86) 21 3251 3871
Fax: +(86) 21 3251 2839

Japan

Sakai Sangyo Co., Ltd
1349-1 Hosojima, Shimada City
Shizuoka Prefecture 427-8512
Japan
Phone: +(81) 547 35 2727
Fax: +(81) 547 35 0015

Korea

Fine Commerce Inc.
#506 Daesung Bld.
17-16 Youido-dong
Youngdeungpo-Gu Seoul
150-874 Korea
Phone: +(82) 2769 1114
Fax: +(82) 2769 1088

DISCLAIMER OF LIABILITY

This data is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any liability arising out of its use or performance. The user, by accepting the products described herein, agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement.

BECAUSE OF NUMEROUS FACTORS AFFECTING RESULTS, WE MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. STATEMENTS IN THIS DOCUMENT SHALL NOT BE CONSTRUED AS REPRESENTATIONS OR WARRANTIES OR AS INDUCEMENTS TO INFRINGE ANY PATENT OR VIOLATE ANY LAW, SAFETY CODE, OR INSURANCE REGULATION.