

# C-515 – S Glass Chop

S Glass chopped strand products are engineered for use in bulk and injection molding compounds for reinforcing both thermoplastic and thermoset systems as well as ceramics in slip casting operations.

## General Product Specifications

### Product Information

<b>Product</b>	<b>S 406</b>
Glass Type	<i>S Glass</i>
Binder	406
Nominal Chop Length - in	<b>1/4</b>
Nominal Filament Diameter - $\mu\text{m}$	9
Filament Diameter Tolerance +/-	1.0
Nominal Solids - %	0.80
Solids Tolerance +/-	0.50
Nominal Chop Length - in (mm)	0.27 7.0
Chop Length Tolerance +/- in (mm)	0.08 2.0
Maximum Moisture - %	0.50

### Packaging Information


Package	Box
Nominal Package Weight - lb (kg)	50 (23)
Nominal Pallet Weight - lb (kg)	1350 (612)

Rev 1. 1.18.2024

# C-515 – S Glass Chop

## Nominal Packaging Dimensions

Product	Pallet	Weight / box lb (kg)	Boxes / layer	Layers / Pallet	Boxes / Pallet	L -in (cm)	W -in (cm)	H -in (cm)	Pallet Weight lb (kg)
S Glass 406	Wood	50 (23)	9	3	27	45.5 (115.6)	45.5 (115.6)	67.0 (170.2)	1350 (612)

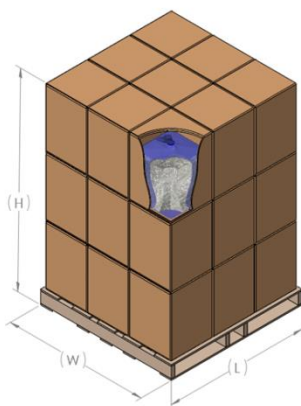

## Storage, Shelf Life and Handling

### Storage and Shelf Life:

AGY recommends storing the materials in accordance with appropriate safety considerations, away from exposure to the elements and at 65-80F (18-27C) and 50-70% humidity. If the materials are stored under these conditions, they are stable, non reactive and will not degrade or exhibit negative characteristics for at least 3 years from the date of manufacture. Unused, unopened product older than this is likely still in good condition, however careful evaluation is recommended. Prior to use, pallets should be placed in the production area and any plastic wrap removed for a minimum of 24 hours to allow the material to acclimate to the processing environment. Special care should be given to pallets being moved from a cold environment into a warm, humid area as condensation may occur and this additional moisture can negatively impact the runability of the material, however, once the material has acclimated, this will no longer be an issue.

For product traceability reasons, the pallet label should be recorded or retained.

### Handling:

Fiberglass products process best if temperature and humidity are controlled, primarily because this will help to minimize the buildup of static electricity, fuzz and fly. AGY recommends that the material be run at 70 +/- 5 degrees F (18-27C) and 60 +/- 5% RH.

## Test Methods and Certificates

A copy of test methods and or a certificate of conformity may be issued upon request.

Chop product are chopped to exact specifications, and are free of contaminates such as clumps of fuzz and out of specification long chop. AGY accepts no responsibility for damaged material that shows any signs of physical abuse

For additional product information, refer to PTS M-712

**AGY – World Headquarters / Americas**  
 2556 Wagener Road  
 Aiken, South Carolina, USA 29801  
 Phone: +(1) 888.434.0945 (toll free)  
 +(1) 803.643.1501  
 Fax: +(1) 803.643.1180  
 Email: asktheexpert@agy.com

**AGY – Europe**  
 Le Gemellyon Nord  
 57 Boulevard Marius Vivier Merle  
 69003 Lyon, France  
 Phone: +(33) 4727 81775  
 Fax: +(33) 4727 81780